KEEPING YOUR BUSINESS

POWERED UP

DEUTZ ENERGY

DEUTZ ENERGY
At a glance

DEUTZ ENERGY Worldwide
Strength Across Continents

- **Global presence** – on 4 continents[1]
- **~320 m€ revenue** annualized 2026
- **~700 employees** across 6 companies
- **Broad genset portfolio** from <10 kW up to >10 MW
- **Large range** of application segments
- **Covering whole value chain** from design to testing

[1] September 2026

DEUTZ ENERGY global footprint
Assets in China, Europe, Africa & America

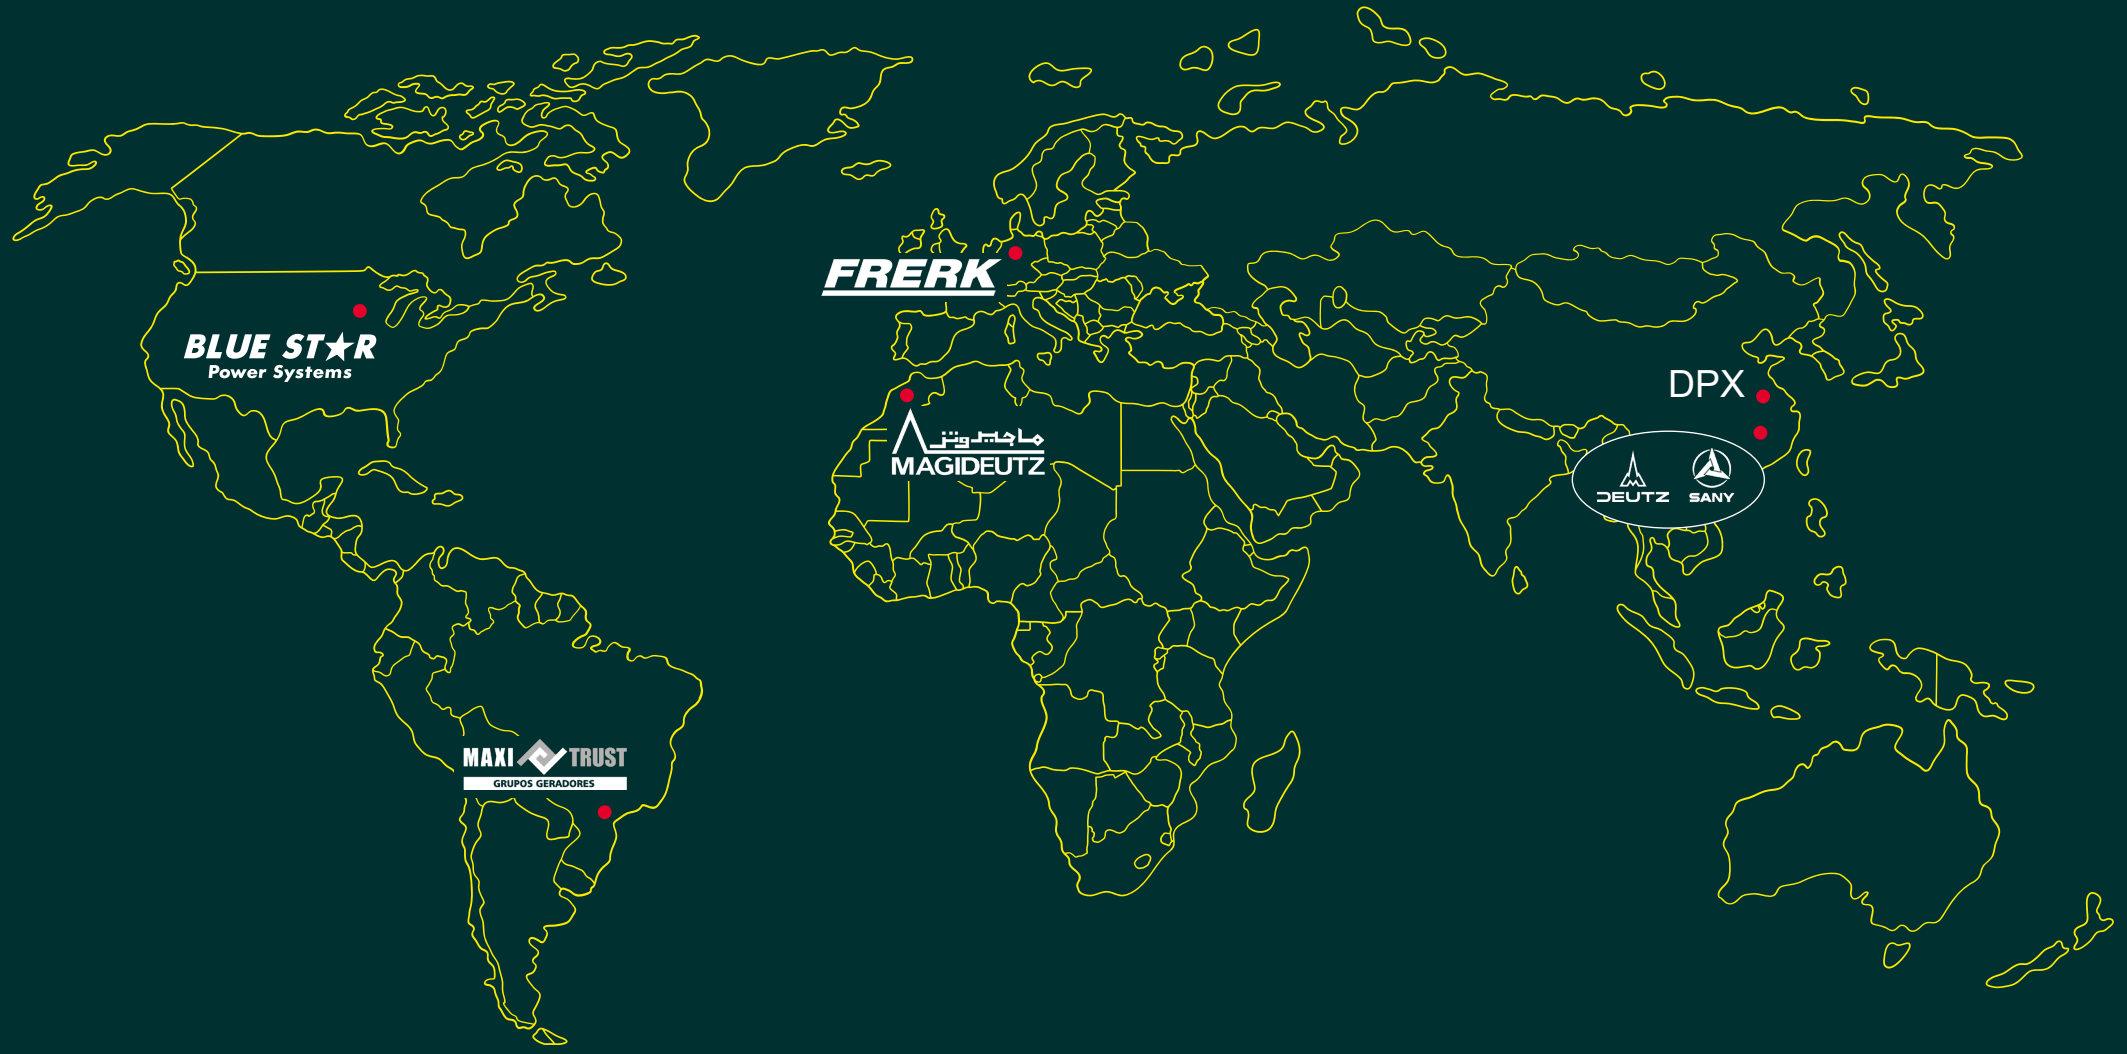

DEUTZ DPS GENSETS
A trusted partner with a clear Value Proposition

Strong Vertical Integration
In-House Local Engine &
Genset Production

Short Lead Time

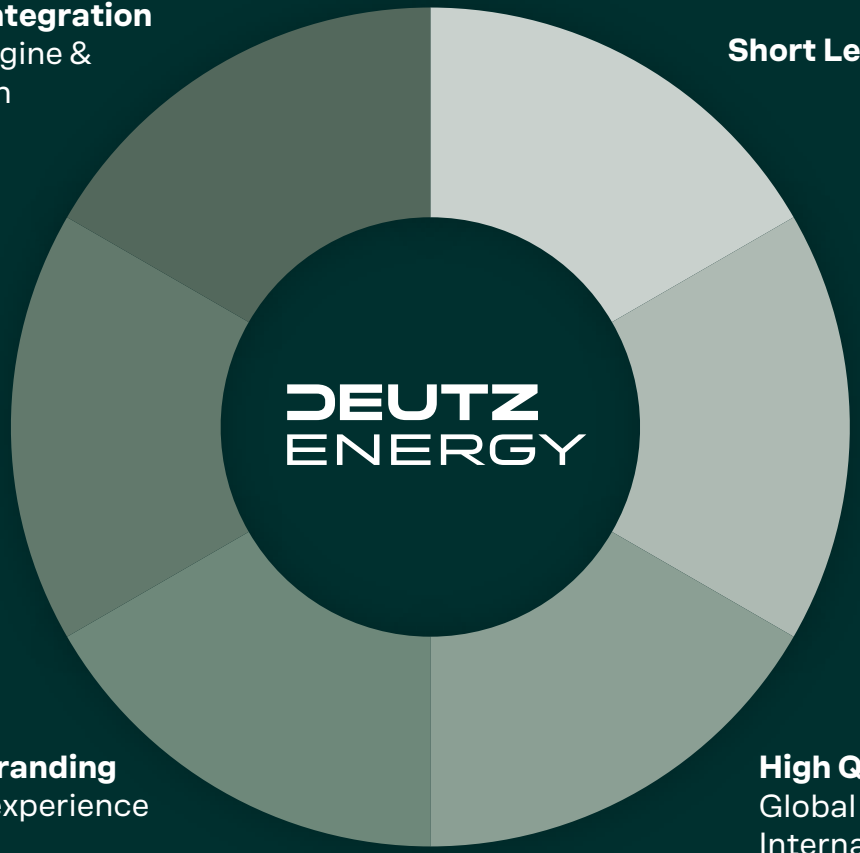

Flexibility & Customization
In-House R&D:
Genset & Engine

Global Network
Sales & Service

DEUTZ DPS Branding
160+ years of experience

High Quality
Global Manufacturing Expertise &
International Standards

Comprehensive Diesel Genset Portfolio
20 – 2750 kVA prime power

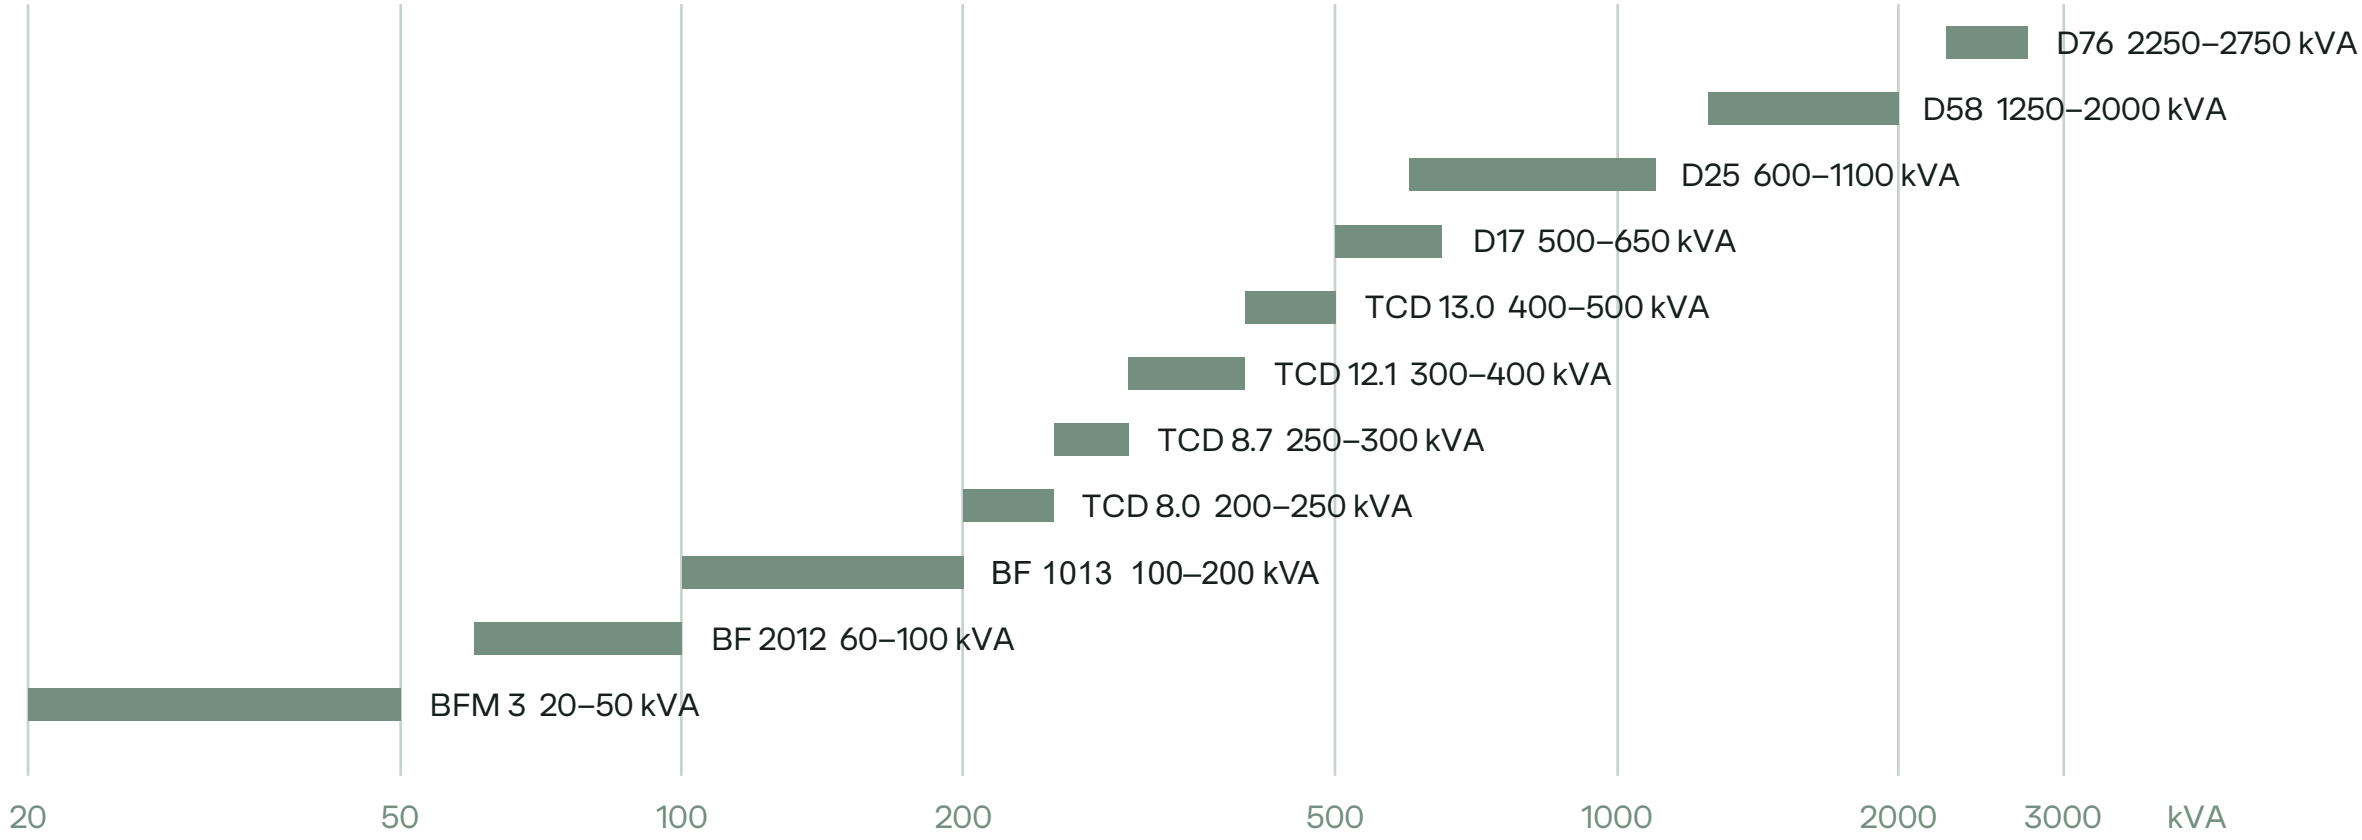

DEUTZ DPS GENSETS
DPS60S & DPS300S

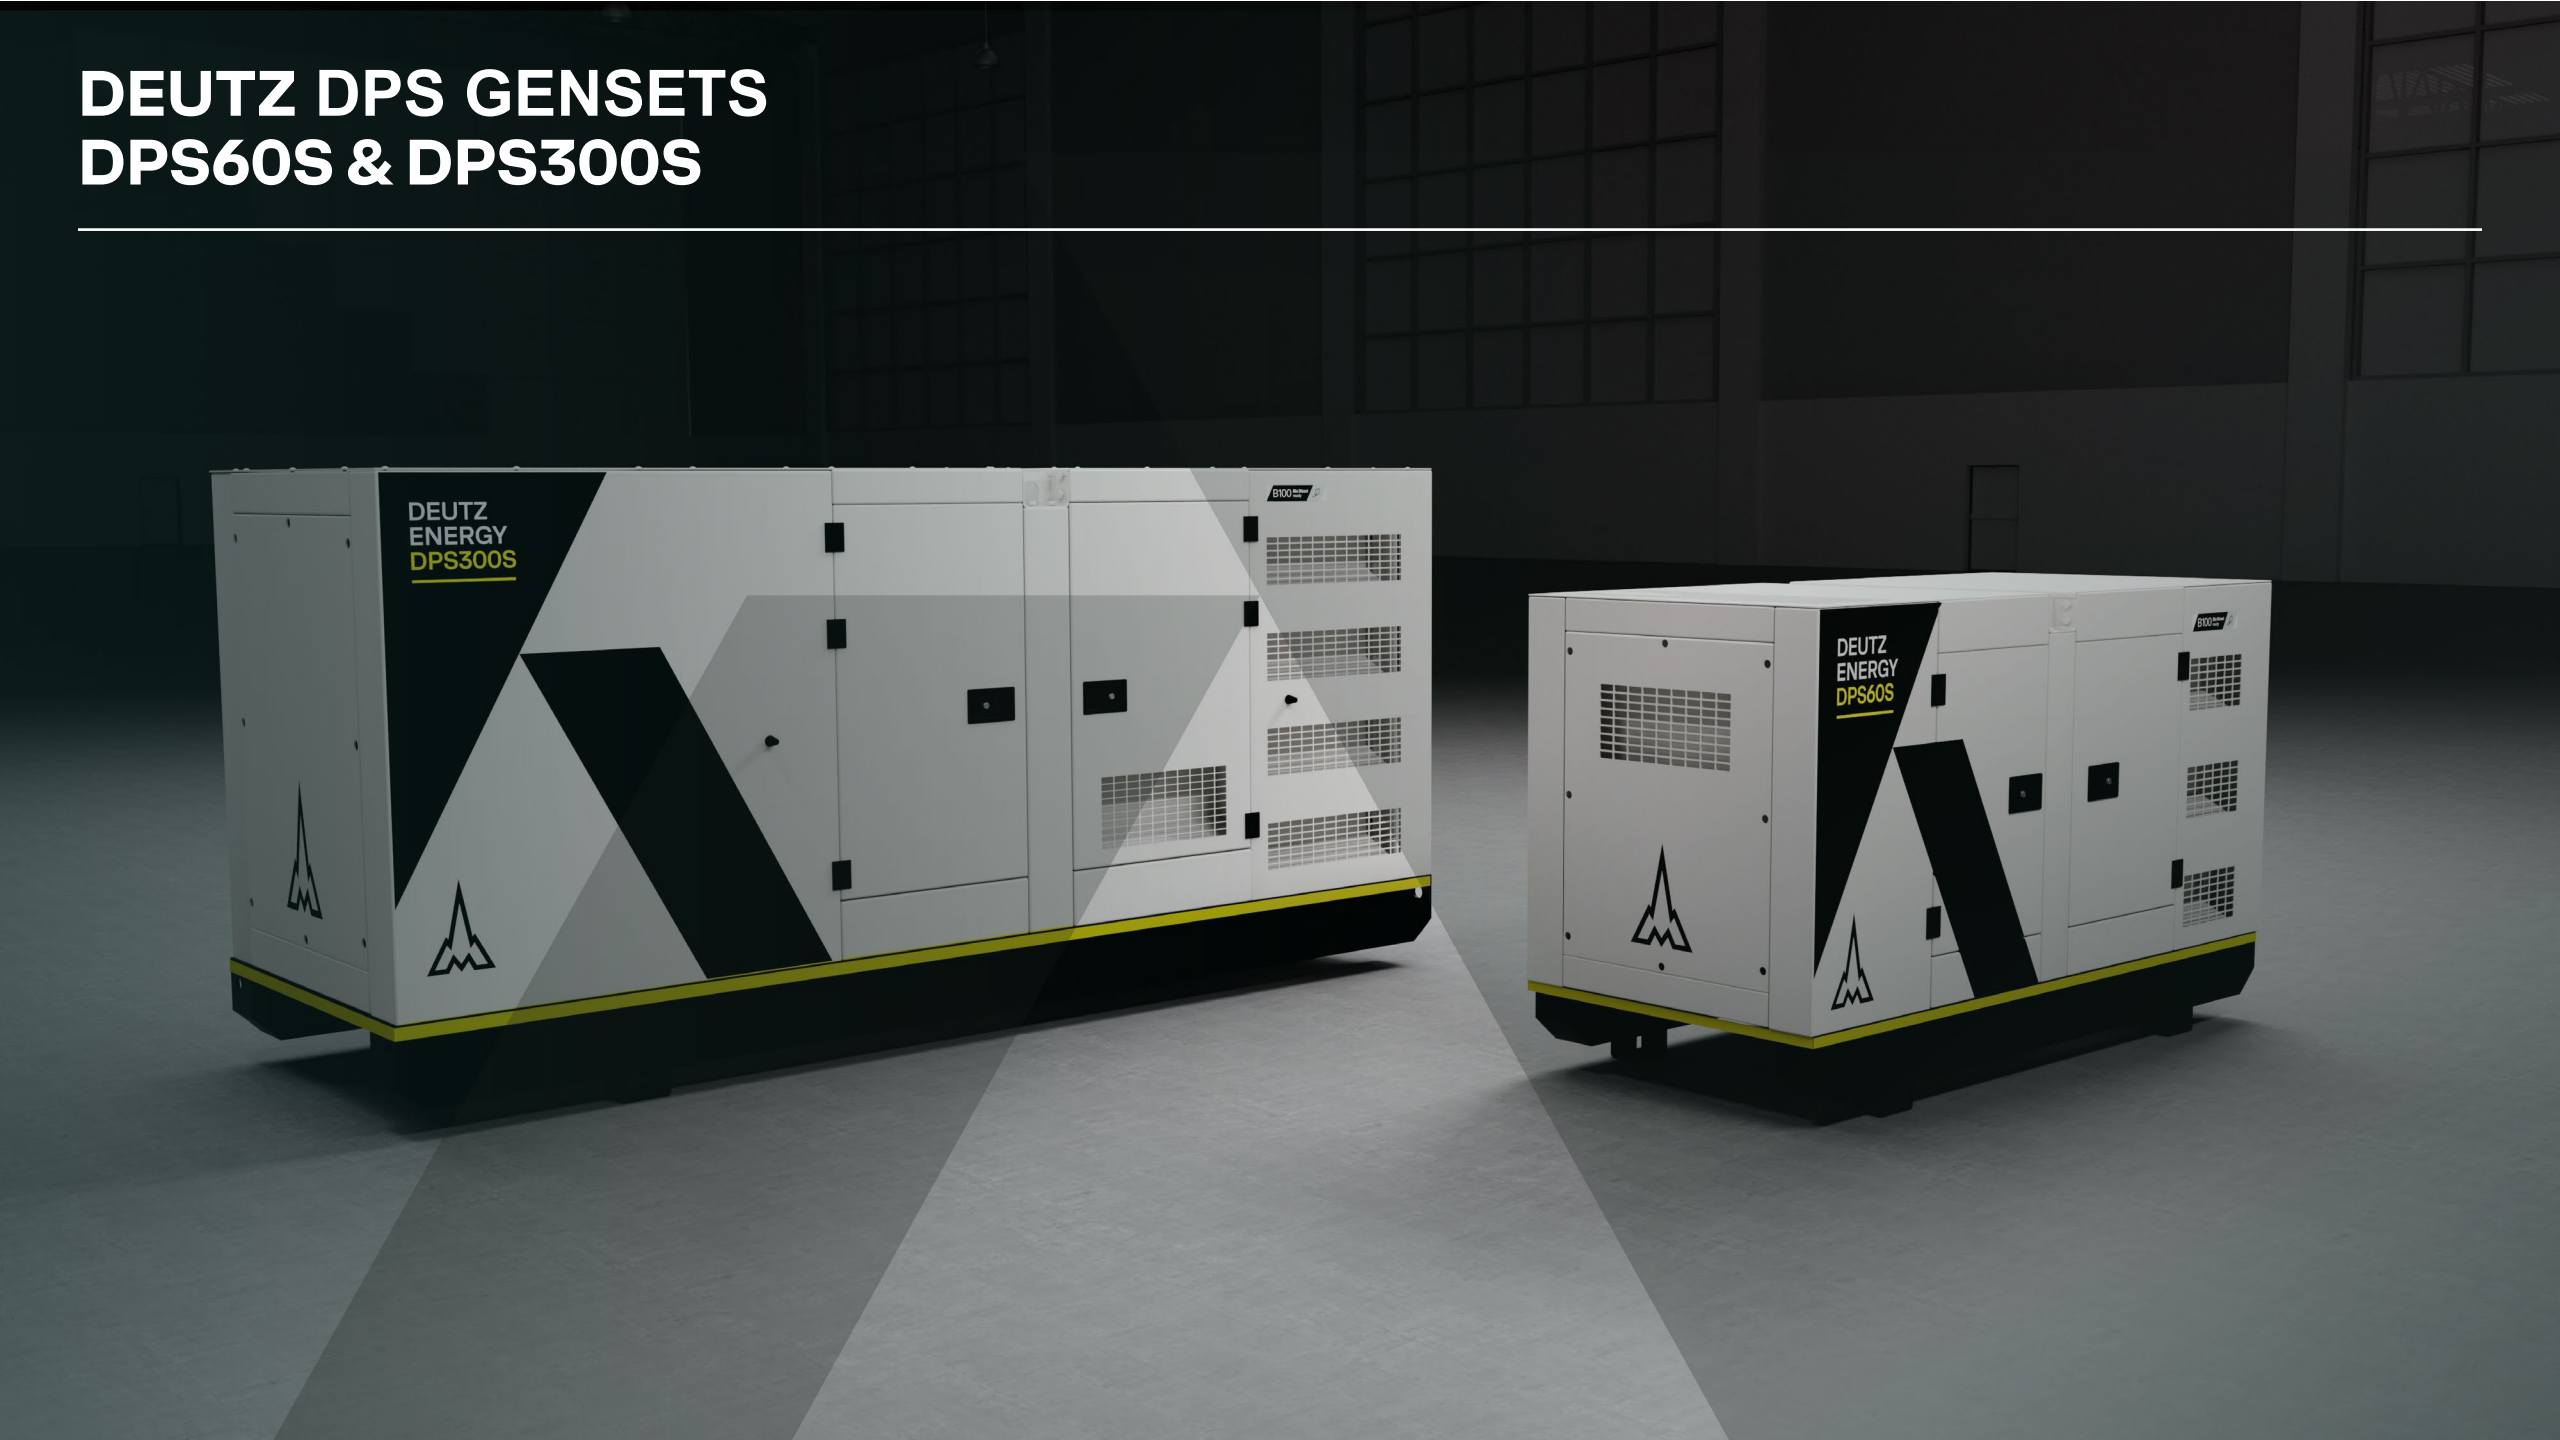

Technical Product Details
DPS60S

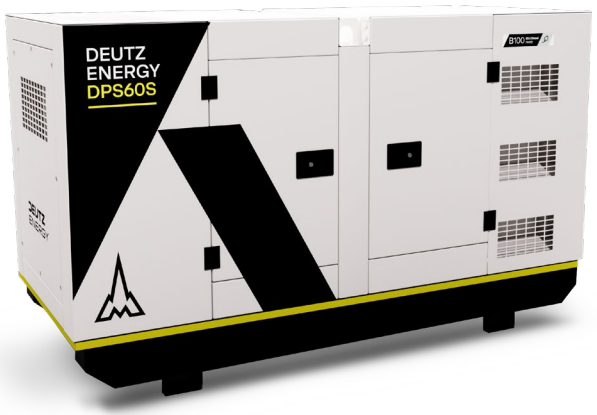

Dimensions

Length	2,90 m
Width	1,12 m
Height	1,43 m
Net Weight	1,7 t

Scope of Supply – Silent Generator Set incl.

Engine	**DEUTZ 2012 (4l)** Output: **54 kW** mech.	
Label	**Diesel and B100 Bio Diesel ready**	B100 Bio Diesel ready
Alternator	**Leroy-Somer TAL-A42-H** **Standby: 52 kW** / 65 kVA **Prime: 48 kW** / 60 kVA **400 V** / 3-phase / 50/60 Hz switchable & customizable **Options** available incl. Stamford, Meccalte	LEROY-SOMER STAMFORD meccalte
Control Panel	**ComAp AMF 8**, option for DEEPSEA DSE6120	ComAp The heart of smart control DSE DEEP SEA ELECTRONICS
Silent Canopy	For **outdoor use (IP23), stackable** with Integrated Cooling System Noise reduced to 80 dB(A) @1m	
On Request	Telemetry System Automatic Transfer Switch (ATS)	

Technical Product Details
DPS300S

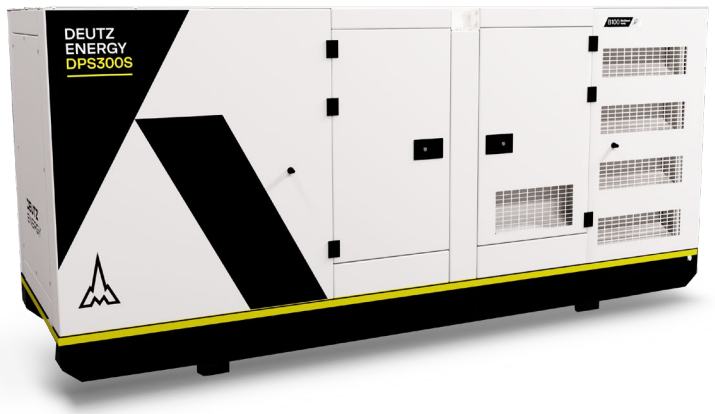

Dimensions

Length	4,20 m
Width	1,30 m
Height	1,90 m
Net Weight	3,155 t

Scope of Supply – Silent Generator Set incl.

Engine	**DEUTZ TCD 8.7** Output: **265 kW** mech.	
Label	**Diesel and B50 Bio Diesel ready** **B100 option on request**	B100 Bio Diesel ready
Alternator	**Leroy-Somer TAL-A46-F** **Standby: 264 kW** / 330 kVA **Prime: 240 kW** / 300 kVA **400 V** / 3-phase / 50/60 Hz switchable & customizable **Options** available incl. Stamford, Meccalte	LEROY-SOMER STAMFORD mecc alte
Control Panel	**ComAp AMF 8**, option for DEEPSEA DSE6120	ComAp The heart of smart control DSE DEEP SEA ELECTRONICS
Silent Canopy	For **outdoor use (IP23), stackable** with Integrated Cooling System Noise reduced to 83 dB(A) @1m	
On Request	Telemetry System Automatic Transfer Switch (ATS)	

Advantages Dual / Quad Engine Configuration
Example: Four-unit power generation set DPSL1520DC1





DPSL1520DC1

- 4 × D13 engine in parallel operation enable 1520 kW in 40 ft standard container.
- Integrated control cabinet with one-touch switching between 50 Hz and 60 Hz, supporting 380–480 V.
- In parallel operation, the number of engines started can be automatically adjusted according to the load size. The generator supports soft loading and **automatic load distribution**, for optimized power management, energy conservation and environmental protection.

Introduction Telemetry System
Available for Gensets above 560 kW

VBOX

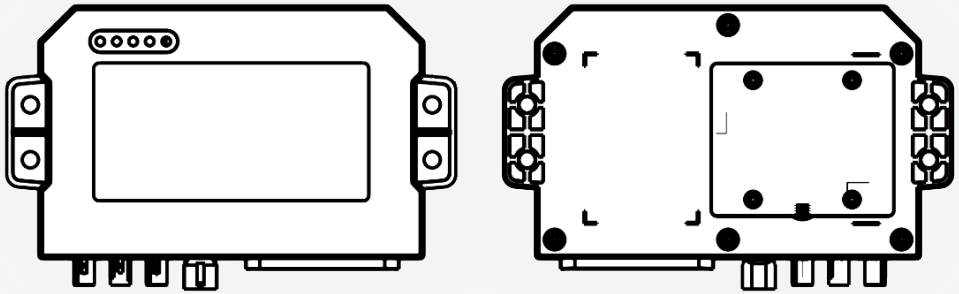

Web interface

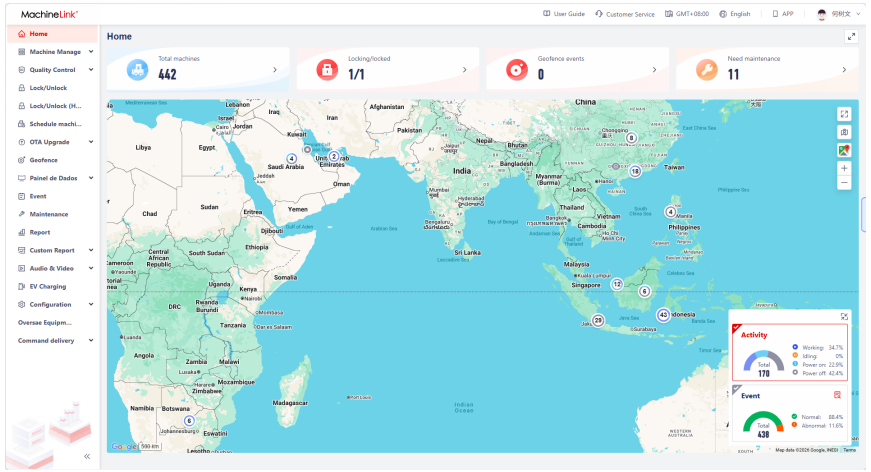

- V-Box will be connected to each genset's engine and genset controller
- Collected data include:
  - engine speed
  - water temperature
  - operating hours
  - fuel level
  - three-phase voltage,
  - three-phase current
  - GPS location
- 4G cloud connection → Web Interface + Mobile App

Introduction Telemetry System
Available for Gensets above 560 kW

VBOX

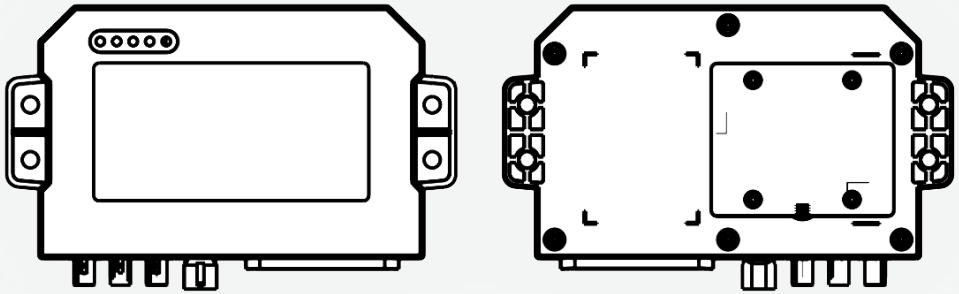

Web interface

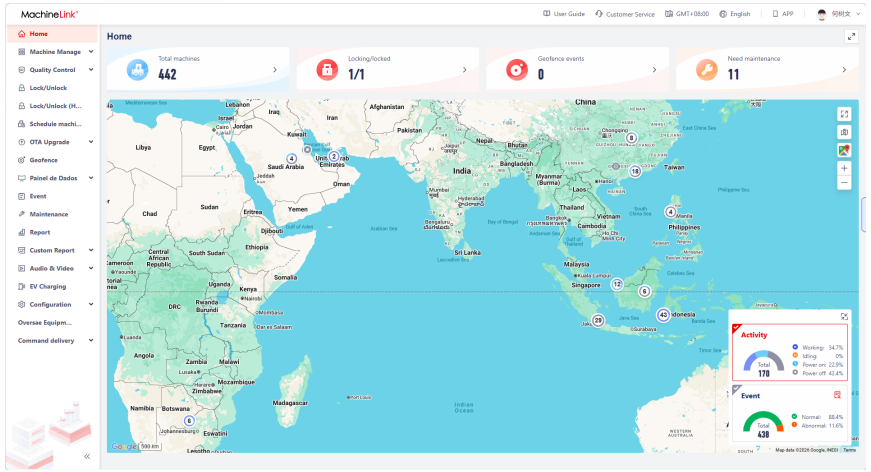

Technical Concept



DEUTZ DPS solution
Complete Pump Set Unit



- Application Examples: Mining, Agriculture
- Engine HDP TCD 8.0,
  245 kW Prime Power Gross Output @1800 RPM
- Pump EIFEL EA250/40,
  900 m^3/h, 142.5 kW @1800 RPM
- Controller Smartgen GCPB400DYC
- Dimensions: 2700 × 1050 × 1526 / 2708 mm
  (height excl. / incl. muffler)
- Also Included:
  - Radiator
  - Coupling
  - Muffler
  - Battery 2 × 12 V = 24 V
  - Base Frame